

SG-16 Briquetting Solution™

for machine industry producing metal chips.
Compress the metal chips into briquettes. Make
storage and transportation easier. Re-use
lubricants in the chips. Sell metal back to refinery.



Briquettes minimize oxidation and slag

With less surface area the oxidation and slag formation in the briquettes is much less than in the chips.

Briquettes are drier than chips

Compressing the chips will remove liquid so melters will pay more for the re-cycled material.

Briquettes are easier to handle

Transporting scrap to the furnace, as well as scrap inside a furnace. It is easier to pick up blocks than chips.

Recover lubricants and coolants

Briquetting process will squeeze out from the chips your precious lubricants and coolants for re-use.



SG-16 Briquetting Solution™ Machine Specifications




	SG -16/70	SG -16/90	SG -16/110	
Production capacity	0.3 – 0.6 tons/h	0.4 – 0.8 tons/h	0.5 – 1.2 tons/h	
Briquette diameter	70 mm	90 mm	110 mm	
Current requirement	<16 A	<16 A	<16 A	

Accessories:

Chip conveyors, shredders, crushers, pre-washers, coolant and lubricant filter systems.

Copyright © 2014 Simolin Water & Energy Ltd All rights reserved. Simolin Water & Energy Ltd logo, Simolin Water & Energy Ltd Briquetting Solution are registered trademarks or trademarks of Simolin Water & Energy Ltd. All other trademarks, logos and trade names mentioned in the document are the property of their respective owners. Specifications are subject to change without prior notice.

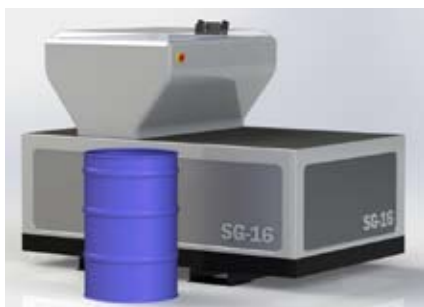

SIMOLIN WATER & ENERGY LTD

Tel: +358 400 349 154
 Email: group@simolingroup.com
 Web: www.simolingroup.com

